



ADAPTER SHALL BE PLACED ON UNDISTURBED GROUND OR 95% COMPACTED GROUND OR ASTM C33 SIZE NUMBER 67 GRAVEL.

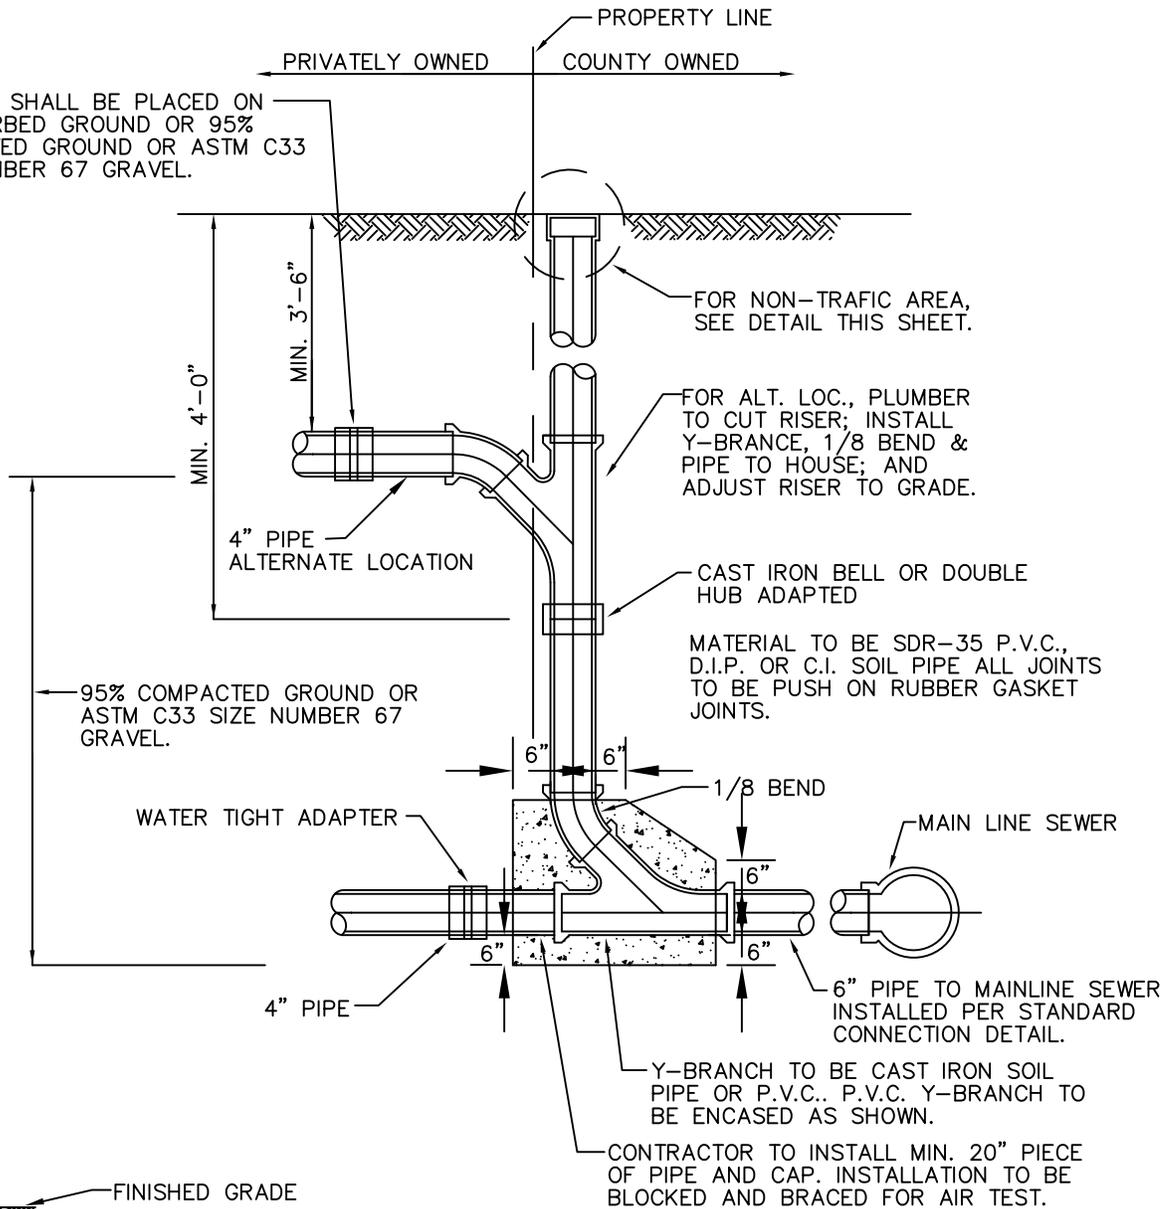

ELEVATION

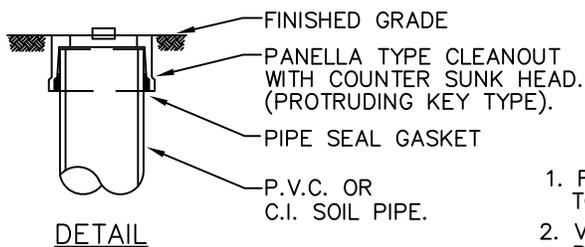

DETAIL

NOTES

1. FOR PAVED AREAS (INCLUDING SIDEWALKS) SEE DETAIL CLEANOUT TOP FOR PAVEMENT AREAS.
2. VERTICAL CLEANOUT RISER STUB SHALL BE 4 FEET OR LESS BELOW SURFACE FOR UNIMPROVED LOTS AND PROVIDED WITH A WATER TIGHT PLUG. LOCATION IS TO BE MARKED WITH A 2"x6" BOARD EXTENDING ONE FOOT MIN. ABOVE GRADE.
3. A FLEXIBLE COUPLING WILL BE REQUIRED BETWEEN THE MAIN AND THE CLEANOUT WYE BRANCH IF THE WYE IS A DIFFERENT MATERIAL THAN THE PIPE.

STANDARD SYMBOL SHC

REVISIONS:	CALVERT COUNTY	STANDARD DETAILS	<u>S</u> 1.22
	DEPARTMENT OF PUBLIC WORKS—BUREAU OF UTILITIES	SEWER CLEANOUT	
	APPROVED: BUREAU CHIEF		
	DATE: DECEMBER 15, 2004		